
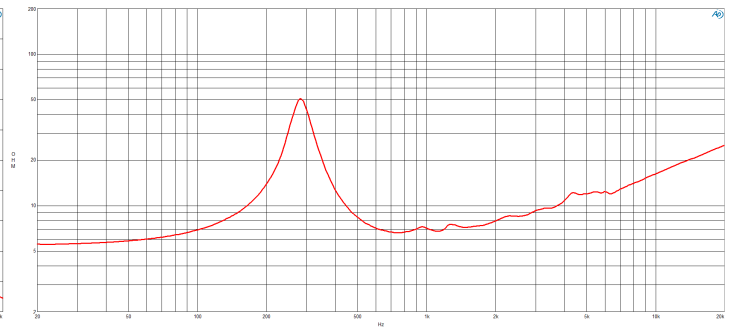


500 W continuous program power capacity  
 51 mm (2 in) aluminium voice coil  
 300 - 6000 Hz response  
 100 dB sensitivity  
 Ideal for Direct Radiation and Horn Loaded Midrange application  
 Aluminium demodulating ring for Extremely Low Distortion

For simplified cabinet assembly and efficient thermal transfer to the air, our NSM series of sealed back midranges feature a cast aluminum sealed chassis, high strength neodymium motor, and large internal volume for good low frequency performance. Large voice coils provide power handling, while careful selection of suspension and cone components results in exceptional sensitivity. These dedicated narrow-bandwidth midranges offer the lowest distortion at given output of any midrange available.

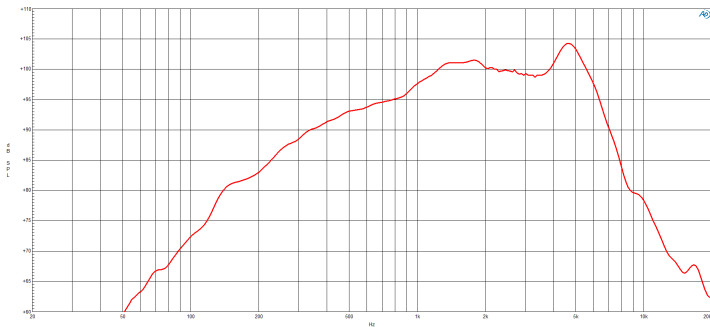

## SPECIFICATIONS

Nominal Diameter	170 mm (6.5 in)
Nominal Impedance	8 Ω
Minimum Impedance	6.6 Ω
Nominal Power Handling	250 W 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
Continuous Power Handling	500 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	100 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	300 Hz - 6000 Hz
Voice Coil Diameter	51 mm (2 in)
Winding Material	Aluminium
Former Material	Glass Fibre
Winding Depth	8.5 mm (0.33 in)
Magnetic Gap Depth	6 mm (0.24 in)
Flux Density	1.6 T
Woofer Cone Treatment	WP Waterproof Front Side

## PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	280 Hz
Re	5.4 Ω
Qes	0.68
Qms	5.4
Qts	0.6
Vas	0.7 dm <sup>3</sup> (0.02 ft <sup>3</sup> )
Sd	143 cm <sup>2</sup> (22.17 sq <sup>2</sup> )
η0	2.2 %
Xmax	2.8 mm
Xvar	3 mm
Mms	13.5 g
Bl	13.9 Tm
Le	0.15 mH
EBP	412 Hz

## DESIGN

Surround Shape	Triple Roll
Cone Shape	Radial
Magnet Material	Neodymium Ring
Spider	Single
Pole Design	T-Pole
Woofer Cone Treatment	WP Waterproof Front Side

## MOUNTING AND SHIPPING INFO

Overall Diameter	187 mm (7.36 in)
Bolt Circle Diameter	172 mm (6.77 in)
Baffle Cutout Diameter	151 mm (5.94 in)
Depth	113 mm (4.45 in)
Flange and Gasket Thickness	11 mm (0.43 in)
Air Volume Occupied by Driver	2 dm <sup>3</sup> (0.07 ft <sup>3</sup> )
Net Weight	2.25 kg (4.96 lb)
Shipping Units	1 pcs
Shipping Weight	2.48 kg (5.46 lb)
Shipping Box	210x180x150 mm (8.27x7.09x5.91 in)

## SERVICE KITS

LF recone-kits	RCK06NSM518
----------------	-------------