
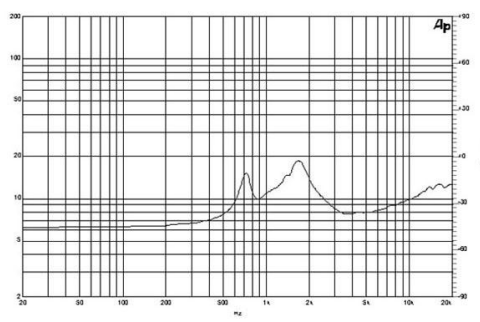


- 120 W continuous program power capacity
- 1" horn throat diameter
- 44 mm (1.7 in) aluminium voice coil
- Polyimide diaphragm
- 1000 - 18000 Hz response
- 108.5 dB sensitivity

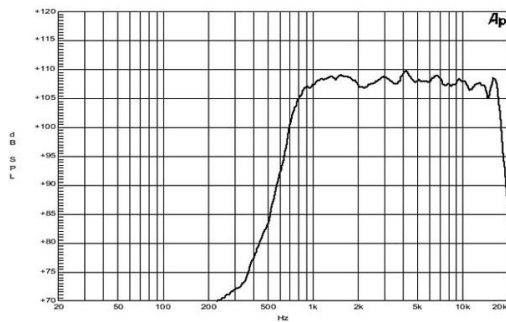

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.8 Ω
Nominal Power Handling	60 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	120 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	108.5 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	1 kHz - 18 kHz
Recommended Crossover	1.6 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Diaphragm Material	Polyimide
Flux Density	1.85 T
Max Frequency Range	18 kHz
Min Frequency Range	1 kHz

MOUNTING AND SHIPPING INFO

Two M6 holes 180° on 76 mm (3 in) diameter Three M6 holes 120° on 57 mm (2.2 in) diameter

Other details	3x M6 Mounting Studs with bolts and washers included
Overall Diameter	120 mm (4.7 in)
Depth	62 mm (2.4 in)
Net Weight	2.15 kg (4.74 lb)
Shipping Units	1 pcs
Shipping Weight	2.21 kg (4.87 lb)
Shipping Box	120x120x65 mm (4.72x4.72x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMDDE2508
--------------------------	-----------